


**ELECTRICAL DIAGRAM**

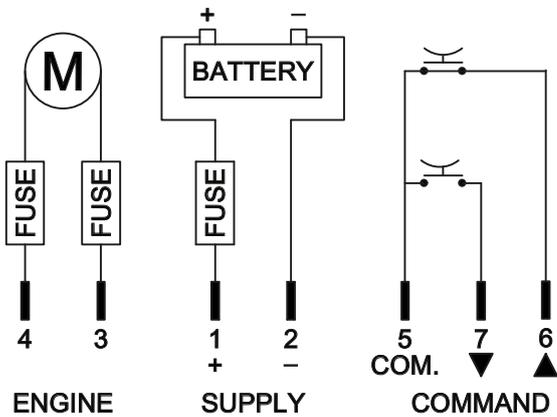

ELECTRONIC CONTROL UNIT FOR END OF STROKE CONTROL OF THE PE50 ELECTRIC PISTONS.

SYSTEM DI ROSATI RESERVES THE RIGHT TO MAKE CHANGES TO THE DIMENSIONS AND CHARACTERISTICS DESCRIBED ON THIS DATA SHEET WITHOUT PRIOR NOTICE.

DATA SHEET			
		S.FC.L	S.FC.I
RATED POWER SUPPLY S.FC.L.V12 AND S.FC.I.V12	V	12	12
RATED POWER SUPPLY S.FC.L.V24 AND S.FC.I.V24	V	24	24
TYPE POWER		VDC	VDC
MAX PISTON LOADING CALIBRATION PE50	N	300	300
TYPE OF COMMAND		LINEAR	IMPULSE
OPERATING TEMPERATURE	°C	from -5 to +60	from -5 to +60
PROTECTION DEGREE ELECTRONIC CONTROL UNIT	IP	55	55
TOTAL WEIGHT ELECTRONIC CONTROL UNIT	Kg	0.490	0.490