


Customer:	Completed by:
Phone/Cell:	Email:

QUESTIONNAIRE

Fill in the spaces below so that we are able to provide you with the most suitable electromagnetic for your needs. The data must be strictly real, without taking any tolerance into consideration, safety tolerances will be assessed by us.

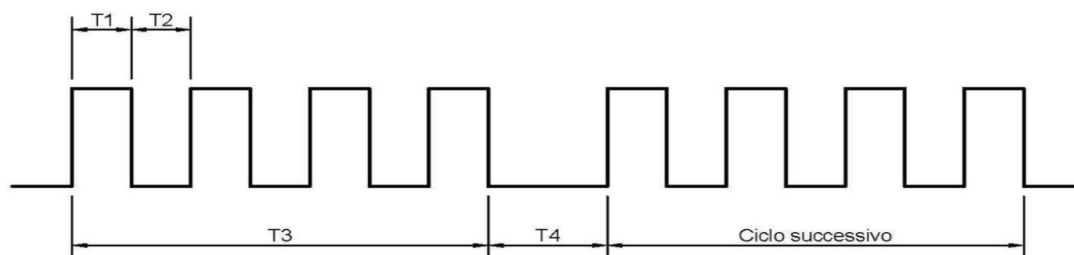

T1 = Electric coil excitation time		Seconds	
T2 = Electric coil de-excitation time		Seconds	
T3 = Total time of an operating cycle		Seconds	
T4 = Time between cycles		Minutes	
▪ Ambient temperature where the electromagnet will be used		between °C and °C	
▪ Battery-powered		Vac	
▪ Mains power supply		Vac	
▪ Rectified power supply only with diode bridge			
▪ Rectified power supply only with diode bridge and levelled with condensers			
▪ Admissible current absorption by the power supply system		Amp	
▪ Position of electromagnet installation	Vertical	Horizontal	Other
▪ Protection rating against the entry of solid objects and liquids		IP	
▪ Stroke start or inrush force		N	
▪ Limit switch or withstand force		N	
▪ Max stroke of mobile nucleus		mm	
▪ Return spring		Yes	No
▪ Work stroke start spring pre-load		N	
▪ Work stroke end spring load		N	
▪ Rear output for thrust		Yes	No

Notes/Observations:

Date:	Signature:
-------	------------